



RJ
Rocker Switches

SPECIFICATIONS

ELECTRICAL RATING : DC 15V 2.5A

CONTACT RESISTANCE : 20 mΩ (initial)

INSULATION RESISTANCE : > 1000MΩ

(500VDC between open contacts)

DIELECTRIC STRENGTH : > 1500V@ 1 minute

ELECTRICAL LIFE : 6000 cycles

TEMPERATURE RISE AT THE TERMINAL : Max.30°C

SOLDER ABILITY OF TERMINAL : Max 350°C,3S (no pressure may be placed in the terminals when soldering by hand)

Any Cd Pb Hg etc and it's compounds is not include in this product

MATERIALS

CASE&HOUSING: Glass filled Nylon 6/6,black.

ACTUATOR : Glass filled Nylon 6/6,Black.


CONTACT : Copper alloy,silver plated.

TERMINALS : Copper alloy,silver plated.


PIN : Brass,nickel plated.



SCHEMATIC



OPEN CIRCUIT



CLOSED CIRCUIT


HOW TO ORDER

MODEL	RJ-001	RJ-002	RJ-003
DIMENSIONS			
PIN Ø A	ø1.65	ø2.00	ø2.50
Ø B	ø5.10	ø6.30	ø6.30


POLE OPTIONS




SPST

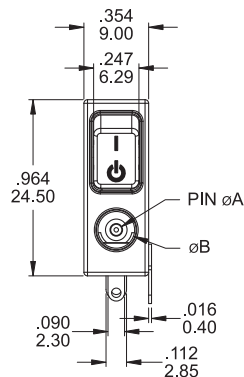


Part No. Shown : RJ-001




P.C. MOUNTING



SPST

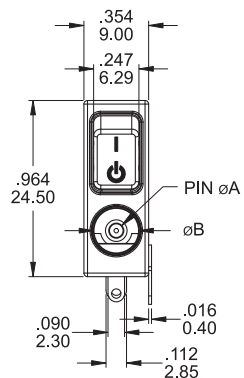

Part No. Shown : RJ-002



P.C. MOUNTING

