



Feature :

- Illuminated LED and bi-color available
- Special thickness transparent cap
- Customer symbol available

Application :



- Audio device
- Video Controller



SWITCH SPECIFICATIONS		LED SPECIFICATIONS									
POLE - POSITION	1P1T , with LED	<p>ATTENTION LEDs are Electrostatic Sensitive devices</p>	Value / LED Color								
CONTACT RATING	12 V DC , 100 mA		Unit	Blue	Pure Green	Red	Yellow	Orange	Green	White	
CONTACT RESISTANCE	200 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP		LUMINOUS INTENSITY@20mA I _v	mcd	/	/	85	/	/	140	/
INSULATION RESISTANCE	50 MΩ MIN. 250 V DC		Dominant Wavelength λ _D	nm	/	/	632	/	/	571	/
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute		FORWARD VOLTAGE@20mA V _f	V	/	/	2.2	/	/	2.2	/
OPERATING FORCE	125 ± 50 gf										
OPERATING LIFE	1,000,000 cycles										
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C										
TOTAL TRAVEL	0.3 ± 0.1 mm										

■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

HOW TO ORDER

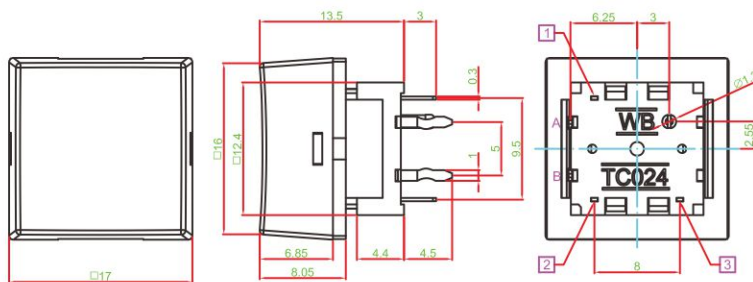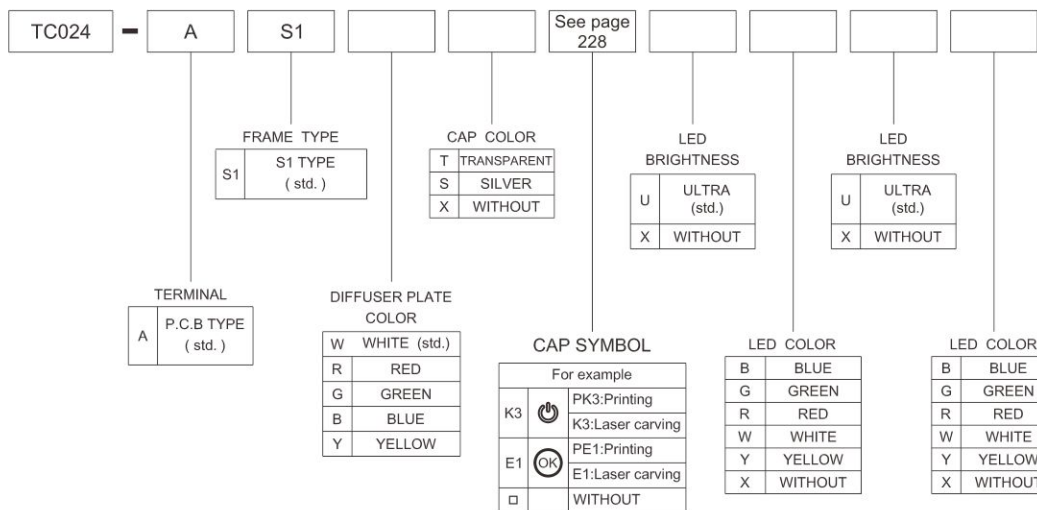

CIRCUIT



P.C.B. LAYOUT

