

● SPECIFICATIONS

CIRCUIT: SPST.

CURRENT: 50mA.

VOLTAGE RATING: 12VDC.

DIELECTRIC WITHSTANDING VOLTAGE:

250VAC for 1 minute.

CONTACT RESISTANCE: 100mΩ Max(initial).

INSULATION RESISTANCE: 100MΩ min.

OPERATING FORCE: 160gf±30.

TOTAL TRAVEL: 0.25mm±0.2mm.

OPERATING LIFE: 100,000CYCLES Min.

SOLDER SPECIFICATIONS: 265°C for 5seconds.

FUNCTION: Momentary.

OPERATING TEMPERATURE: +10°C~+60°C.

HOW TO ORDER





MODEL NO.	LED COLOR	HOUSING MODEL	HOUSING COLOR	CAP COLOR
TS	0=without LED 3=RED 4=ORANGE 6=GREEN	A= B=	2=BLACK(std) 9=GRAY	2=BLACK(std) 3=RED 4=ORANGE 6=GREEN 9=GRAY

SWITCHING COMBINATION

P.C. MOUNTING




TS-X-A-X-X






TS-3-A-X-X

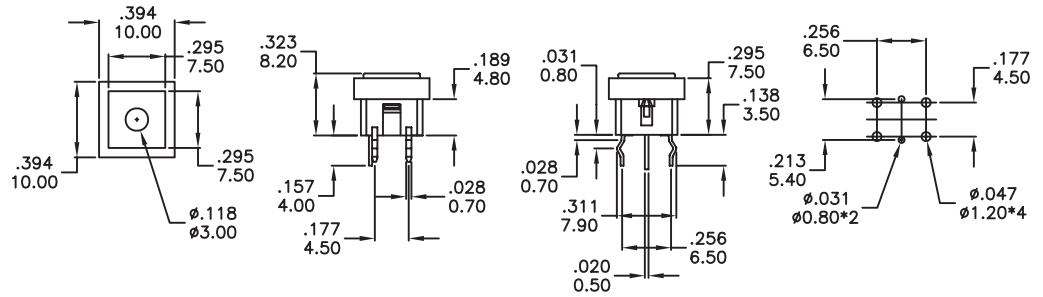

TS-X-B-X-X

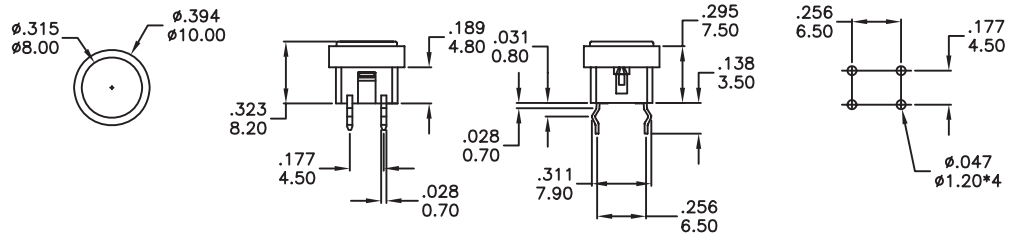

TS-3-B-X-X

