



SPECIFICATIONS

CIRCUIT : DPDT

RATING : 0.1A, DC30V MAX/100mA, DC1.5V MIN

CONTACT RESISTANCE : 50 mΩ MAX.

INSULATION RESISTANCE : 100 MΩ MIN.

ELECTRICAL LIFE : 50,000 cycles

ACTUATION FORCE : 250 ± 100g

TRAVEL:

1. Full Travel : 1.5 ± 0.4mm

2. Contact Travel : 1.0 ± 0.4mm

OPERATING TEMPERATURE RANGE : -20°C to 70°C

MATERIALS

CASE : LCP, black.

HOUSING : Glass filled Nylon 6/6, black.

ACTUATOR : Glass filled Nylon 6/6, gray.

CONTACT : Copper alloy, silver plated.

TERMINALS : LCP, black & Copper alloy, silver plated.

HOW TO ORDER

MODEL NO. FUNCTION LED COLOR

PSD


Function
7 On-Mom

Led color


ITEM NO	COLOR
0	Without LED
3	Red
5	Yellow
6	Green
7	Blue

TYPE	Switch Action	
	Normal ON	Push (ON)
PSD7	1-2 4-5	2-3 5-6
LED Circuit	L1  L2	

PSD70

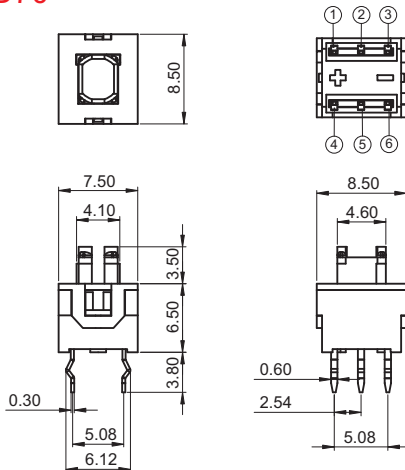

PSD7X

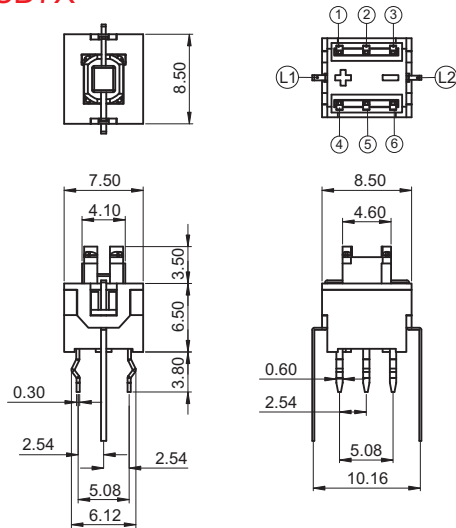

WITH LED ELECTRO-OPTICAL DATA

* The LED specification for reference only

Lens Appearance	Color	Electro-optical Data(AT 20mA)				Peak wavelength	Viewing Angle 2Θ 1/2 (deg)
		Vf (V)		Iv (mcd)			
		Typ.	Max.	Min.	Typ.		
Water Clear	Red	1.95	2.5	80	200	630	140°
	Yellow	2	2.5	300	400	590	140°
	Green	3.3	4.1	400	500	525	140°
	Blue	3.3	4	80	190	470	140°